

WMHC-445-DLX-SS PARTS LIST:

- | | |
|-------------------|--|
| (1) GL150-6-S | 6" Raincan Shower Head - Pivotal Ball Joint -Satin Finish |
| (2) SR-41-90 | 41" Stainless Steel Riser |
| (3) WB-3 | 3" Stainless Steel Wall Bracket & Flange (screws included) |
| (4) HC-445-DIV-SS | Hot & Cold Stainless Steel Valve with diverter for accessories - 8" Center - ADA Compliant Lever Handles |
| (5) HSH-0101-60 | Hand Spray with 60" Flexible Stainless Steel Hose |

Accessories may vary due to
availability and slight modifications by the manufacturer.

**WMHC-445-DLX-SS
Installation Guidelines**

Recommended Shower Head Height: 75-78".

Water Supply Line threads should be exposed through wall and roughed in at 42-45" from flooring surface with **8" center spread**.

1. Rough in ½" FPT hot & cold water lines through mounting surface. Level pipes.
2. Slide wall bracket over Riser. Tighten set screw when placed at desired position.
3. Install Riser to faucet using Teflon tape.
4. Attach Supply Arms to exposed ½" water lines using Teflon tape.
5. **NOTE:** Flush supply lines before installing valve.
6. Place washers inside supply arm nuts and attach to valve.
7. Secure unit to wall with stainless steel screws by marking position using wall bracket as a guide.
8. Attach Shower Head to Riser. Teflon Tape is not needed.
9. Attach hose making sure black rubber washer is in place.

NOTE: A check valve may be required inside the wall for hot & cold water supply lines.





Outdoor Shower Company, LLC
Dallas, Georgia
678-363-3939
www.outdoorshowerco.com

MODEL NUMBER:
WMHC-445-DLX-SS


SUBMITTED AS SHOWN:

SUBMITTED AS NOTED :




ADA COMPLIANT

FRONT VIEW

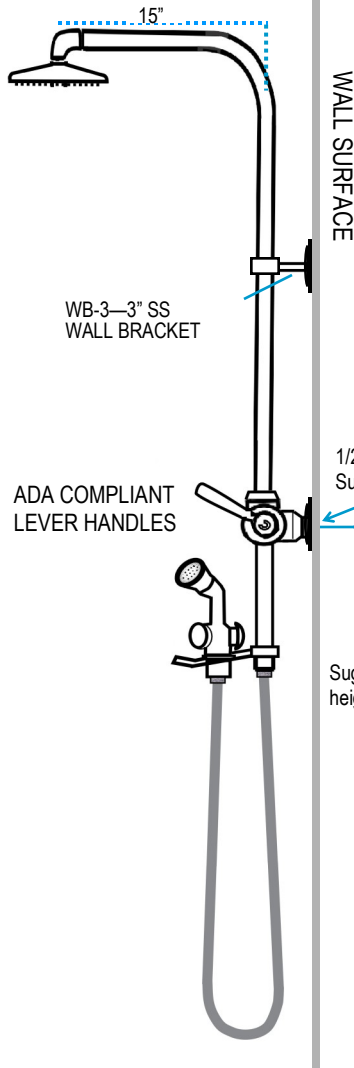

SIDE VIEW

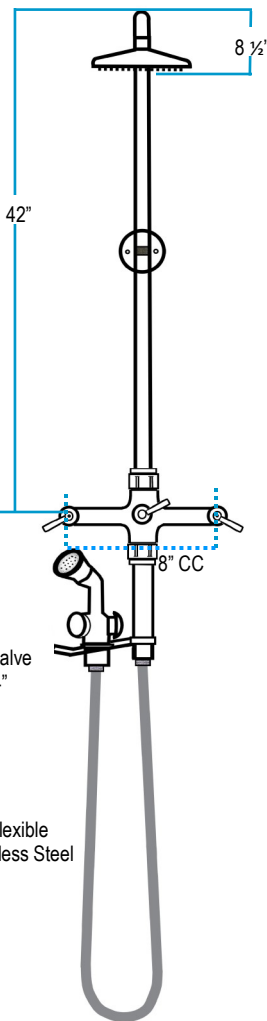

TECHNICAL DATA:

- EXPOSED WALL MOUNTED SHOWER FITTING
- 1/2" MPT INLETS
- 8" CENTER SPREAD STAINLESS STEEL VALVE
- ADA COMPLIANT CHROME PLATED BRASS LEVER HANDLES
- 1/2" X 41" STAINLESS STEEL RISER TBE
- CHROME PLATED BRASS HAND SHOWER
- 60" STAINLESS STEEL FLEXIBLE HOSE
- 6" STAINLESS STEEL "RAINCAN" SHOWER HEAD

DATE:

BY:

CHCKD:

APP'D:

REV:

WMHC-445-DLX-SS ACCESSORIES & REPLACEMENT PARTS

WMHC-445-DLX-SS - Stainless Steel Wall Mount Hot & Cold —Hand Spray, 6" Shower Head



OPTIONAL ACCESSORIES

WMHC-445-DLX-FS-SS HAND SHOWER & FOOT SHOWER

WMHC-445-FS-SS FOOT SHOWER ONLY


The Foot Shower comes standard with a Lever Handle; however, an ADA Metered Push Handle or a Cross Handle are available upon request.

WMHC-445-DLX-HB-SS HAND SHOWER & HOSE BIBB

WMHC-445-HB-SS HOSE BIBB ONLY

The Hose Bibb comes standard with a Cross Handle; however, Lever Handles are available upon request.

HSH-0101 HAND SPRAY & HOSE

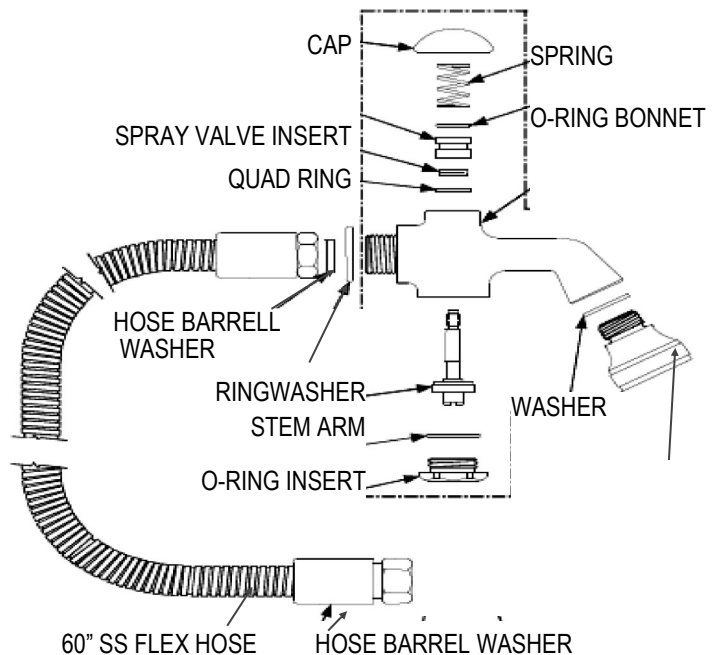

WINTERIZING: It is recommended that a shut-off valve be installed in the water line going to the pool shower connection where freezing temperatures can occur. Accessories can be removed and other parts partially disassembled for complete protection against freeze damage.

FREEZE DAMAGE IS NOT COVERED BY THE WARRANTY.